




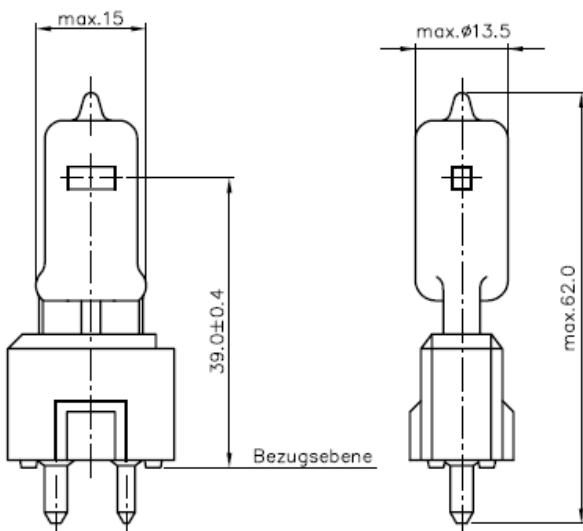
## Airfield Halogen Bipin

|   |  |
|---|--|
|  | <b>Type 6128</b><br><b>6,6A 120W GZ9,5</b>   |
|   | <b>Ordering – No.</b><br><b>58355</b>  |
| <b>Product description</b>  | Halogen Airfield Lamp with Bi-pin base   |
| <b>Features</b>   | high and constant lumen output, long lifetime, small size                                    |
| <b>Applications</b>   | Approach lights<br>Threshold lights<br>Runway lights<br>Taxiway lights<br>Obstruction lights |

## Technical Details

|  |   |
|--|---|
| Rated current (A)                      | 6,6   |
| Wattage (W)                            | 120 +/- 10%   |
| Luminous flux (lm)                     | 3150 +/- 10%  |
| Lumen maintenance                      | min. 90% after 375 h  |
| Average lifetime (hours)               | 500   |
| Base                                   | GZ9,5   |
| Maximum Overall Length (mm)            | max. 62   |
| Bulb Diameter (mm)                     | max. 13,5   |
| Light Center Length (mm)               | 39,0 +/- 0,4  |
| Maximum allowed pinch temperature (°C) | 350   |
| Filament Type                          | CBAR-6  |
| Burning Position                       | S   |
| Chromaticity                           | Within white boundaries   |
| Packaging quantity                     | 100 pcs.  |
| Environmental remark                   | Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment". |

## Drawing (in mm)



|             |                         |
|-------------|-------------------------|
| valid from  | 05.03.2014—V2—PN14/0072 |
| replace for | 30.01.2013—V1           |
| file        | 58355.100.pdf           |