





Airfield Halogen Bipin

| | |
|---|--|
|  | Type 6112 LL 6,6A 30W GZ9,5 |
| | Ordering – No. 58312 |
| Product description | Halogen Airfield Lamp with Bi-pin base |
| Features | high and constant lumen output, long lifetime, small size |
| Applications | Approach lights Threshold lights Runway lights Taxiway lights Obstruction lights |

Technical Details

| | |
|--|---|
| Rated current (A) | 6,6 |
| Wattage (W) | 30 +/- 10% |
| Luminous flux (lm) | 375 +/- 10% |
| Lumen maintenance | min. 90% after 1500 h |
| Average lifetime (hours) | 2000 |
| Base | GZ9,5 |
| Maximum Overall Length (mm) | max. 47 |
| Bulb Diameter (mm) | max. 11 |
| Light Center Length (mm) | 25,4 +/- 0,4 |
| Maximum allowed pinch temperature (°C) | 350 |
| Filament Type | C-8 |
| Burning Position | S |
| Chromaticity | Within white boundaries |
| Packaging quantity | 100 pcs. |
| Environmental remark | Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment". |

Drawing (in mm)

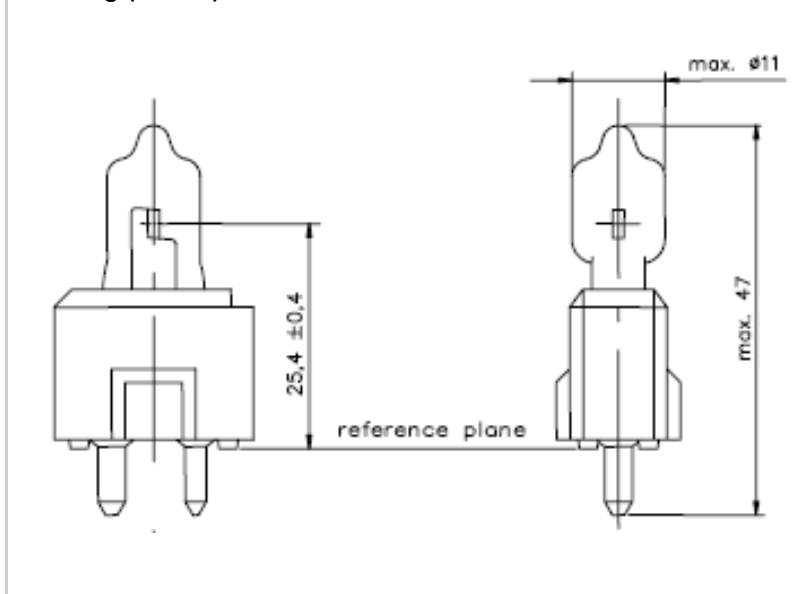

| | |
|-------------|-------------------------|
| valid from | 05.03.2014—V2—PN14/0072 |
| replace for | 30.01.2013—V1 |
| file | 58312.100.pdf |